

Introducing the Dimmable SNC4 Driver Series - Low Cost, High Value

Powerful Performance in a Slim Profile

The SNC4 dimmable SELV linear range delivers efficient, flicker-free DALI-2 dimming in an ultra-slim lp housing ideal for linear, battens and continuous-line luminaires. With wide selectable currents across 20–75 W and dependable Tridonic performance, these drivers offer strong flexibility for OEMs and installers. Designed for modern commercial lighting, they combine safety, efficiency and smooth dimming in an easy-to-integrate format.

SELV

20w – 35w Constant current LED driver for luminaire installation

W	Description	Article No.	Housing	Forward Voltage	100mA	150mA	200mA	250mA	300mA	350mA	400mA	450mA	500mA	600mA	700mA
20w	LC 20/100-450/54 DA lp SNC4	87501218	lp	Vf Min Vf Max	20v 54v	20v 54v	20v 54v	20v 54v	20v 54v	20v 54v	20v 54v	20v 44v	-	-	-
35w	LC 35/250-700/54 DA lp SNC4	87501219	lp	Vf Min Vf Max	-	-	-	20v 54v	20v 54v	20v 54v	20v 54v	20v 54v	20v 54v	20v 54v	20v 50v

55w – 75w Constant current LED driver for luminaire installation

W	Description	Article No.	Housing	Forward Voltage	500mA	550mA	600mA	650mA	700mA	800mA	900mA	1050mA	1200mA	1400mA	1500mA	1650mA	1800mA	1900mA
55w	LC 55/500-1050/54 DA lp SNC4	87501220	lp	Vf Min Vf Max	20v 54v	20v 54v	20v 54v	20v 54v	20v 54v	20v 54v	20v 54v	20v 52.4v	-	-	-	-	-	-
75w	LC 75/1100-1400/54 flexC lp SNC4	87501221	lp	Vf Min Vf Max	-	-	-	-	-	-	20v 54v	20v 54v	20v 54v	20v 53.6v	20v 50v	20v 45.5v	20v 41.7v	20v 39.5v


Key Benefits

-  DALI-2 Dimming
-  Selectable Output Current (DIP Switch)
-  slim lp housing – 21mm High



Your Go-To Solution for Quality Dimmable LED Drivers

Build Your DALI Control System Around The SNC4 DALI Driver Range With Our Eco-System Products

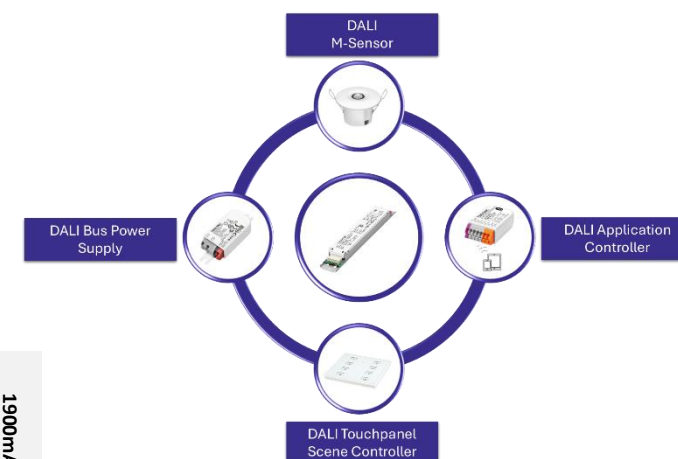

TRIDONIC

DISTRIBUTION UK

Bring smooth DALI-2 dimming to your next linear project with SNC4 DALI drivers

